

MinuteMan Calling Card/Billing System

MinuteMan

SciDyn's MinuteMan calling card platform provides a turnkey calling card validation and billing system platform priced to fill the needs of emerging carriers utilizing voice over data applications.

MinuteMan provides carrier-grade functionality including interactive voice response supporting up to 99 languages, credit and debit card processing, programmable call rating, and a complete pre-paid/post-paid billing system.

MinuteMan is a compact scalable platform with both analog and digital interfaces. Sizes range from 4 analog ports up to 28 T1/E1 ports in a single chassis. Start with a small platform for market analysis and as your business grows, network multiple chassis together for expanded performance and capacity.

SciDyn's unique design provides 100% compatibility with all telco vendors without complicated configurations or protocol interoperability difficulties. MinuteMan can even provide answer supervision to your analog termination points eliminating costly digital connections.


SciDyn has been providing computer telephony products and billing platforms for more than 20 years and now serves thousands of nodes worldwide. Please contact us for more information at +1 856 424-0068 or sales@scidyn.com.



Standard Features

- Analog, T1, E1, PRI interfaces
- 4 Analog up to 28 T1/E1 ports per chassis
- User friendly graphic user interface
- Scalable for unlimited growth potential
- Proven interactive voice response
- Supports up to 99 languages
- Credit and debit card validation
- Complete pre-paid/post-paid billing system
- Per minute, flat rate, and variable call rating
- Programmable rate controls
- Account reports by account number or ANI
- Reports by carrier
- Multiple carrier call routing
- Multiple security and user levels
- Customized branding for advertising announcements in several markets
- Extensive CDR reporting
- World leading fraud controls
- Automated operator for 0 plus calling

Unique Functionality

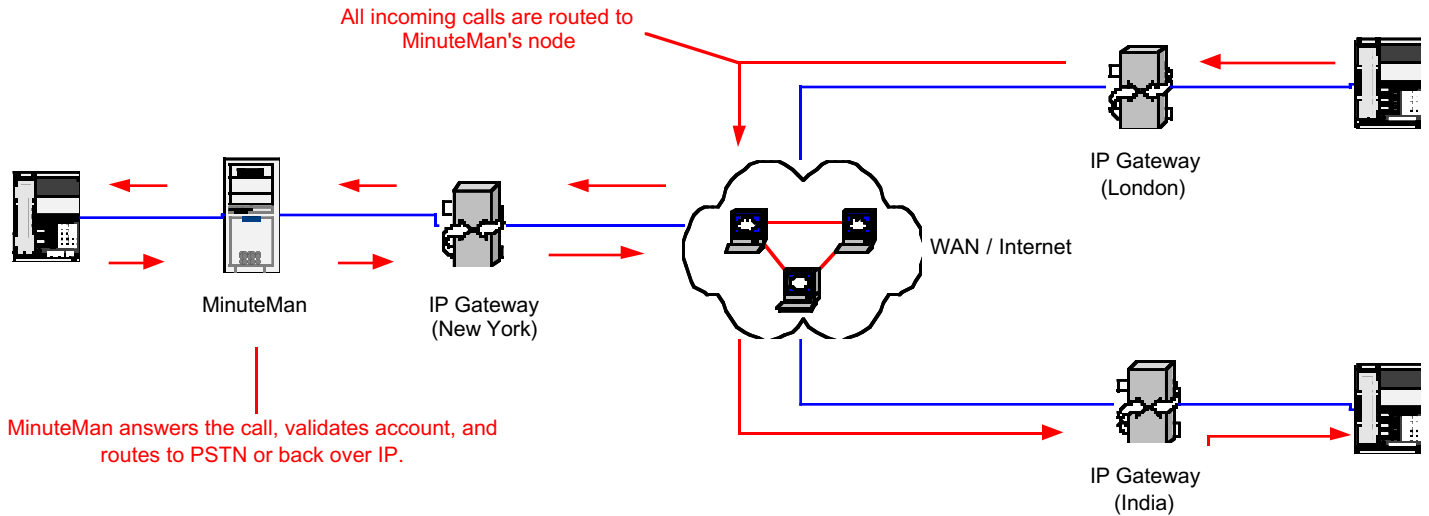

* Our unique design allows MinuteMan to control the entire network

Minuteman Specifications

Dimensions:

- 8.75" (H) x 8.75" (W) x 16.91" (D), 17.9" (D) with handle
- 22 cm (H) x 22 cm (W) x 43 cm (D), 45 cm (D) with handle

Weight:

- 14.9 lbs. (6.76 kg) includes power supply, fan, backplane and face plate

Power:

- Autoswitching 120 to 240V AC
- 300-Watts maximum
- Redundant power supply

Optional:

- -48V DC

Operating Environment:

- Temperature: 23–40°C
- Humidity: 10–90% noncondensing
- Altitude: Up to 10,000 ft. (3050m)

Software:

- BubbleLINK® software architecture
- Station message detail record output (AMA)

LAN Interfaces:

- 10/100 Base T
- N+1 Fault Tolerance Software

CORPORATE HEADQUARTERS
Science Dynamics Corporation
2059 Springdale Road
Suite 100
Cherry Hill, NJ 08003 USA
Tel: 1-856-424-0068 • Fax: 1-856-751-7361
E-mail: sales@scidyn.com

